





RH1156DPA

POS MONITOR



FEATURE

- Full 15.6" TFT Panel, 1366(H) x 768(V)
- Flat panel design, with optional P-Cap Touch (10 points)
- Slim Aluminum Frame with slot-less metal back cover
 - Support USB (Type C) or HDMI (Type A), VGA input
- Support 75mm x 75mm or 100mm x 100mm standard base

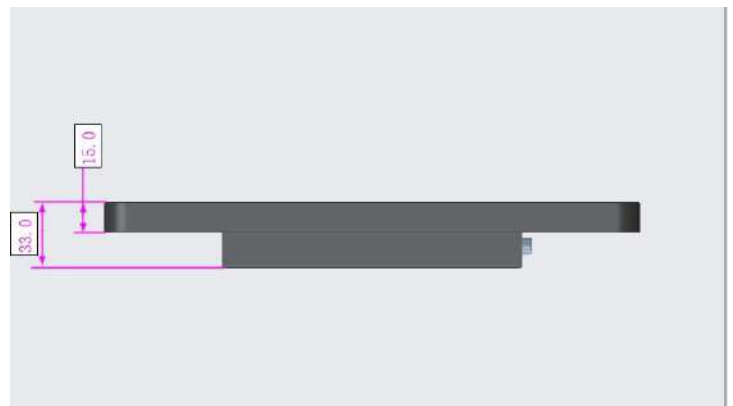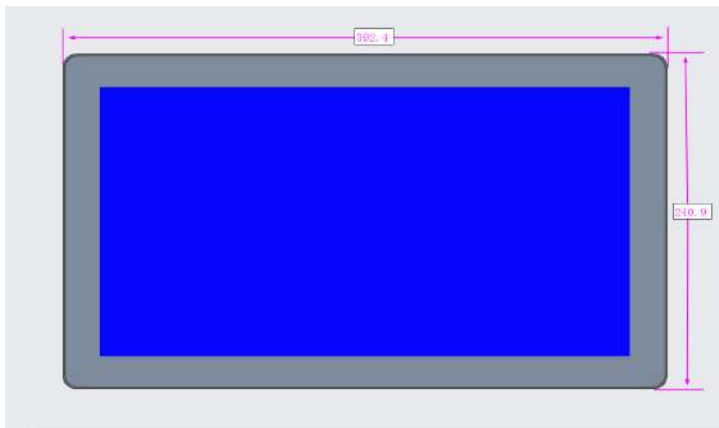



RH1156DPA POS MONITOR

SPECIFICATION

Panel	Active Area	344.23(H) x 193.54(V), mm (15.6")
	Resolution	1366(H) x 768(V)
	Display Colors	262K, 6 bits Color Depth
Signal Input	Brightness / Contrast	220 cd/m2 / 500:1
	USB (Type C)	USB 2.0 for DP156A-U
	HDMI (Type A)	Digital for DP156A-H
Power Adaptor	VGA	Analog for DP156A-V
	Input	Universal AC 100~240V, 50/60Hz
	Output	DC 12V 2A
Power	Management	VESA DPMS
	Consumption	<= 4W
Touch	P-CAP	Touch P-CAP Support 10 multiple touch points
Mounting	Standard	75mm x 75mm or 100mm x 100mm, M4
Environment	Operating Temperature	0 C° to +50 C°
	Storage Temperature	-20 C° to +60 C°
	Operating Humidity	10% to 85%