



RM3132AK

Quotation for Interactive kiosk





- Metal construction



- Providing with scanner & printer; designed with space for fixing card reader or other modules




- Scanner



- Flip design of lockable front cover for easy maintenance



- Designed with two - channel speakers

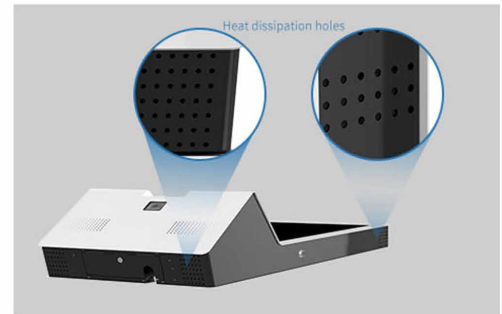

- Holes for heat dissipation



RM3132AK

Quotation for Interactive kiosk

SPECIFICATION

System	OS Support	WIN 7/10 (trial version)	Android 5.1 and higher version
	CPU	Celeron J1800 dual-core 2.41G	RK3288 Cortex-A17 quad-core 1.8GHz
	System Memory	2G/4G	2G/4G
	Disk	64G/128G/256G(SSD)	8G/16G/32G/64G
Interface	Speaker	5W*2	5W*2
	Interface	USB*3/RJ45*1	USB*2/RJ45*1
	Network	Ethernet/WIFI	Ethernet/WIFI
Touchscreen	Type	Projective Capacitive Touch (10 points)	Response time 10ms
LCD	Type	TDT-LCD	Contrast Ratio 1100: 1
	Screen size	31.5"	Response Time 10ms
	Max Resolution	1920 x 1080	Viewing Angle H178 ° V178°
	Aspect Ratio	16:9	Display Colors 16.7M
	Brightness	400cd / m2	Refresh Rate 60Hz
	Panel Life	30000 hours	
Built-in Device	Printer	80mm thermal printer with auto cutter	Scanner 2D, Area-Imaging Scanner
Enclosure	Voltage	100-240VAC,50/60HZ	Power Consumption <100W
Power	Material	SPCC	Surface Powder coating
	Overall Size	L550*W467*H1851mm(floor-standing); L500*W226*H1210mm(Wall-mounting)	
	Package	L1915* W680* H465mm (floor-standing); L1325*W615*H435mm(Wall-mounting)	
	Net Weight	85kg(floor-standing) / 35kg(wall-mounting)	
	Gross Weight	120kg(floor-standing) / 88kg(wall-mounting)	
Application	Working Temperature	0 - 40°C	Storage Temperature -20 ~ 60°C
	Working Humidity	20% -80%	Storage Humidity 10% ~ 90%
	Application	indoor	