



Fanless



WiFi



MSR



iButton



Fingerprint



2nd Display



Customer Display

## EVAPOS RF1314

El EVAPOS RF1314 es una solución de punto de venta ultra delgada de diseño moderno y de tamaño ideal para espacios reducidos.

Con su diseño sin ventilador y sin ranuras de ventilación el EVAPOS RF1314 es un sistema silencioso y resistente al polvo. Con un elegante soporte en forma de diamante, una pantalla táctil resistiva de formato ancho (16:9); y su ranura para disco duro de fácil servicio, ofrece una integración perfecta para una variedad de módulos periféricos como MSR, iButton, lector de huella, y pantalla de cliente en varios formatos.



### Características

EVAPOS RF1314 es un equipo ideal restaurantes, hoteles y ventas al por menor.

- Pantalla de 14" formato ancho; True-Flat Resistive o PCAP Touch
- Sin ventilador y silencioso
- Disco duro de fácil servicio
- USB frontal para fácil servicio

Periféricos opcionales:

- Lector de tarjetas de banda magnética
- iButton y lector de huella
- Segunda pantalla y pantalla de cliente

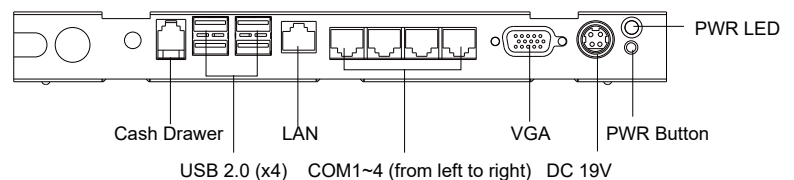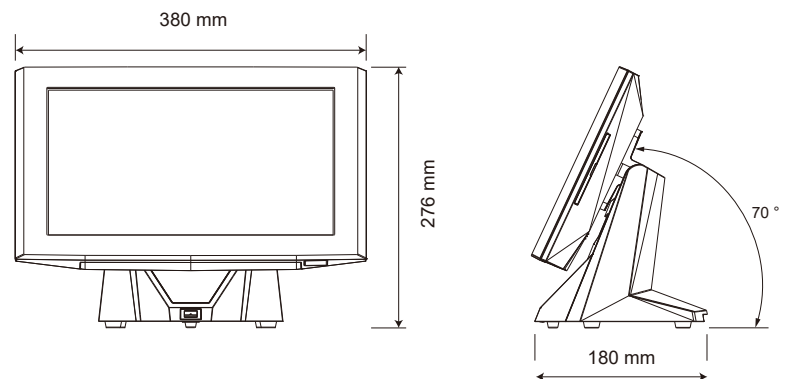

## Especificaciones

| Model                 | EVAPOS RF1314                                                                                                                                   |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Motherboard           | C56L                                                                                                                                            |
| Processor             | Intel Cedarview D2550 CPU, 1.86 GHz, L2 1MB, TDP 10W                                                                                            |
| Chipset               | Intel NM10                                                                                                                                      |
| System Memory         | 1x DDR3 SO-DIMM up to 4GB, 1066MHz                                                                                                              |
| Graphic Engine        | Intel GMA 3650 (Gfx frequency up to 640MHz), DX9                                                                                                |
| System Storage        | N/A                                                                                                                                             |
| LCD Touch Panel       |                                                                                                                                                 |
| LCD Size              | 14" TFT LCD                                                                                                                                     |
| Brightness            | 200 nits                                                                                                                                        |
| Resolution            | 1366 x 768                                                                                                                                      |
| Touch Screen          | Resistive or True-Flat PCAP Touch                                                                                                               |
| Tilt Adjustment       | 0°~70°                                                                                                                                          |
| Storage Device        |                                                                                                                                                 |
| Hard Drive            | 14" TFT LCD                                                                                                                                     |
| Flash Memory          | 1x SATA SSD card (option)                                                                                                                       |
| Expansion             |                                                                                                                                                 |
| Mini PCI-E Socket     | 1                                                                                                                                               |
| External I/O Ports    |                                                                                                                                                 |
| USB                   | 4x USB2.0                                                                                                                                       |
| Serial Port           | 4x RJ45 (COM1 standard RS232; COM2/3/4 powered RS232 (COM2 default 0V; COM3 default 5V; COM4 default 12V by Jumper Setting)                     |
| LAN                   | 1x RJ45                                                                                                                                         |
| Cash Drawer           | 1x RJ11 (12V/24V, default 24V by Jumper Setting)                                                                                                |
| VGA                   | 1x DB15 (12V power by Jumper Setting)                                                                                                           |
| DC Jack               | 1                                                                                                                                               |
| Micro SD              | N/A                                                                                                                                             |
| Control / Indicator   |                                                                                                                                                 |
| Power Button          | 1                                                                                                                                               |
| LED Indicator         | 1                                                                                                                                               |
| Power                 |                                                                                                                                                 |
| Power Adapter         | 65W/ 19V                                                                                                                                        |
| Communication         |                                                                                                                                                 |
| Wireless LAN          | 802.11 b/g/n WLAN card & antenna (Option)                                                                                                       |
| Peripheral (Option)   |                                                                                                                                                 |
| MSR                   | 3-Track MSR (USB)                                                                                                                               |
| iButton               | iButton (USB)                                                                                                                                   |
| Fingerprint           | Fingerprint Reader (USB)                                                                                                                        |
| 2nd Display           | 14" without touch                                                                                                                               |
| Customer Display      | LCM display 2 x 20 characters (USB)                                                                                                             |
| Certificate           |                                                                                                                                                 |
| EMC & Safety          | FCC Class A, CE Mark, LVD                                                                                                                       |
| Environment           |                                                                                                                                                 |
| Operating Temperature | 0°C ~ 35°C ( 32°F ~ 95°F )                                                                                                                      |
| Storage Temperature   | -20°C ~ 60°C (-4°F ~ 140°F)                                                                                                                     |
| Humidity              | 20% ~ 85% RH non-condensing                                                                                                                     |
| Dimension (WxDxH)     | LCD 70° tilt angle: 380 x 180 x 276 mm (15.0" x 7.1" x 10.9")                                                                                   |
| Weight                | 3.7 kg (8.2 lbs)                                                                                                                                |
| Mounting              | VESA Mount 75 x 75 (for Panel PC Type)                                                                                                          |
| OS Supported          | Windows XP Professional, Windows XP Embedded, Windows XP Professional for Embedded, POSReady 2009, Windows 7 (32bit), POSReady 7 (32bit), Linux |



¿Tienes preguntas, necesitas ayuda?

Escríbenos a:

**ventas@evapos.co**