



RH1156APOS

Point Of Sale 15,6"



★ Features

- Fanless and flat design
- Made of aluminum frame and metal cover
 - Cables are covered, easy to clean
- Support several CPU and OS platforms.
 - Support PCAP touch
- Support second display mounting (VFD, 7", 10.1", 10.4")
 - With several panel sizes for fitting your application
 - Use SSD hard drive, with SSD cover
- With strong and elegant zig-zag metal stand



RH1156APOS


Point Of Sale 15,6"



Specification



Dimension

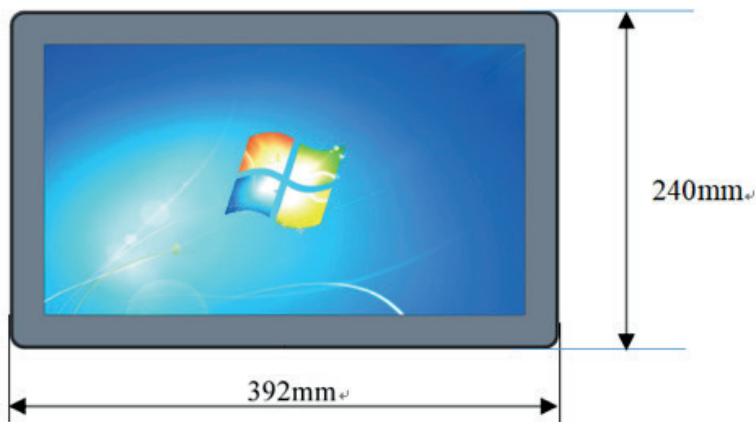



RH1156APOS

Point Of Sale 15,6"



Specification

Processor	CPU	Intel® Celeron® Processor J19002	Intel® i3-6100U	Intel® i5-6200U
	Frequency	2 GHz	2.3 GHz	2.8 GHz
	L2 Cache	2 MB	2 MB	2 MB
	BIOS	UEFI	UEFI	UEFI
Memory	Technology	Support DDR3L-1333MHz	Support DDR3L-1333/1600MHz	
	Max. Capacity		Up to 8GB (1 x 204-pin SO-DIMMs)	
Display	Controller		Intel® HD Graphics	
	Graphic Memory		Shared System Memory up to 1.7GB SDRAM	
	Main Display Resolution		15.6 inches (1366 x 768), HD version on demand	
	Second Display Interface		VGA (Default), HDMI (on demand)	
	Touch Panel		PCAP	
Video Input	VGA Signal		RGB Analog	
	Horizontal Frequen		31 to 48KHz	
	Vertical Frequency		56 to 72Hz	
Storage	mSATA		SATA SSD 120GB (Default), with SSD cover, easily replaced	
Ethernet	Controller	Realtek® RTL8111G-CG GbE LAN	Intel® WGI211AT for 1000 Mbps	
Audio	Controller		Realtek® ALC662 5.1 channel HDA Codec, supports MIC/Line-out Ports	
I/O Interface	USB	3 x USB 2.0; 1 x USB 3.0	2 x USB 2.0; 2 x USB 3.0	
	Second Display		USB Type C (on the top of the back cover)	
	Serial		3 x DB9 COM	
	Powered USB		1 x USB 12V; 1 x USB 24V (Optional, replacing 2 x DB9)	
Power Adaptor	Input		Universal AC 100~240V, 50/60 Hz	
	Output		DC +12V 5A	
Environment	Storage Temperature		-15°C ~ 55°C	
	Operation Temperature		-0°C ~ 40°C	
	Operation Humidity		10% ~ 85%	
Mounting	Standard		Zig-Zag Stand/ VESA Mount	